


GBF

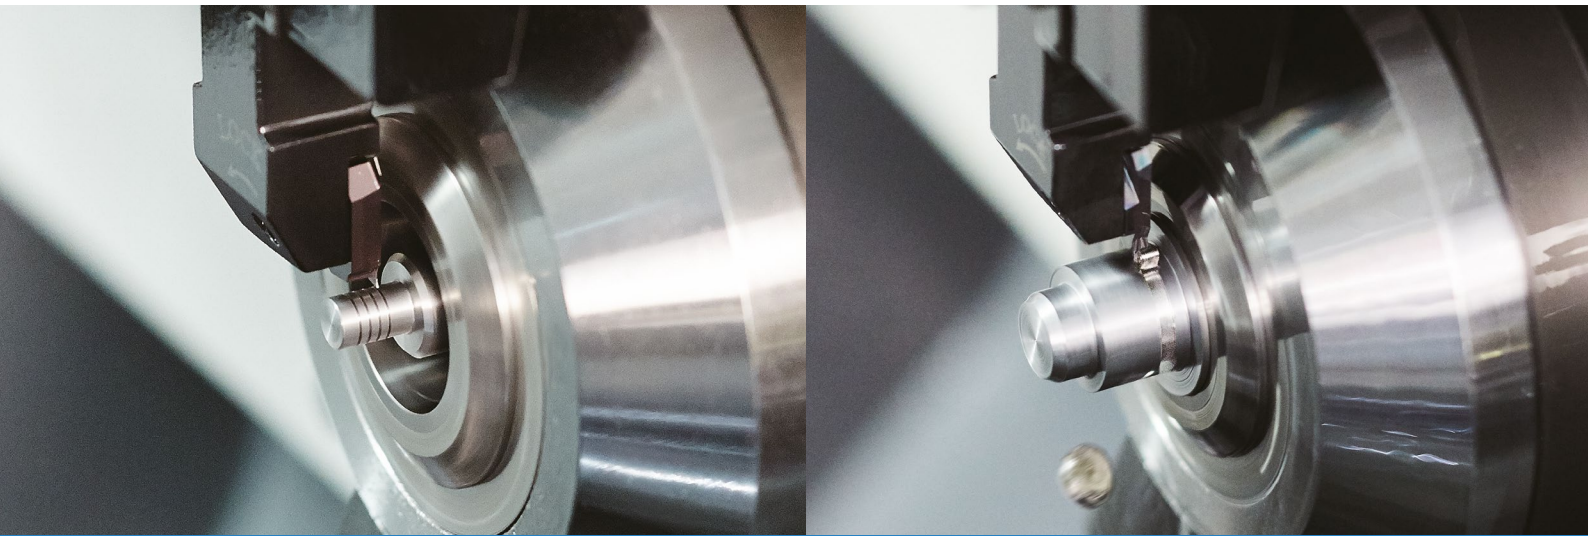

High precision grooving tools for small parts machining

Groove widths from 0.25 mm to 3.00 mm and maximum groove depths up to 3 mm

Available corner-R: 0.00/0.05/0.10 mm


Stable chip control with GL chipbreaker



Lineup expansion: Ground chipbreaker (Corner-R 0.10) and external sleeve holder



JCTM series direct coolant holder for small parts machining

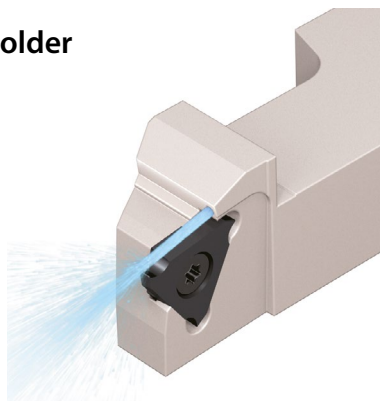



GBF

High precision, the edge width tolerance: $\pm 0.02\text{mm}$

Long tool life and high efficiency machining achieved by MEGACOAT technology

1 Large lineup allows to satisfy various user needs


Insert **NEW** Lineup expansion: Ground chipbreaker
 Corner-R 0.10 mm is available for groove widths 0.75, 0.80, 0.95, 1.00, 1.10, and 1.20 mm

	Lineup		Features
 Ground chipbreaker	Width of groove CW (mm) 0.25 ~ 0.65 0.75 ~ 2.0 2.25 ~ 3.0	Corner-R [rε] (mm) 0.00/0.05 0.00/0.05/0.10 0.05/0.10	<ul style="list-style-type: none"> • Sharp cutting performance • Large lineup
	Each width of groove has both R-hand and L-hand		
 Molded GL chipbreaker	Width of groove CW (mm) 0.75 ~ 1.0 1.5 ~ 3.0 R-hand only	Corner-R [rε] (mm) 0.05 0.10	<ul style="list-style-type: none"> • Excellent chip control • Stable machining


1st Recommendation

Steel	MEGACOAT PR1215
Stainless steel	MEGACOAT NANO PR1535
Non-ferrous material and cast iron	GW15


Coating properties

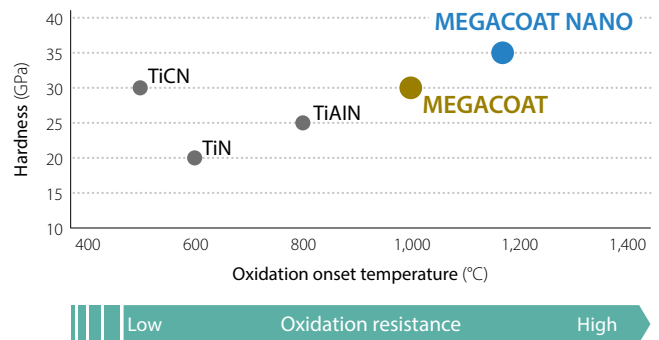

Toolholder **NEW** KGBF-JCT holder for high pressure coolant added to lineup

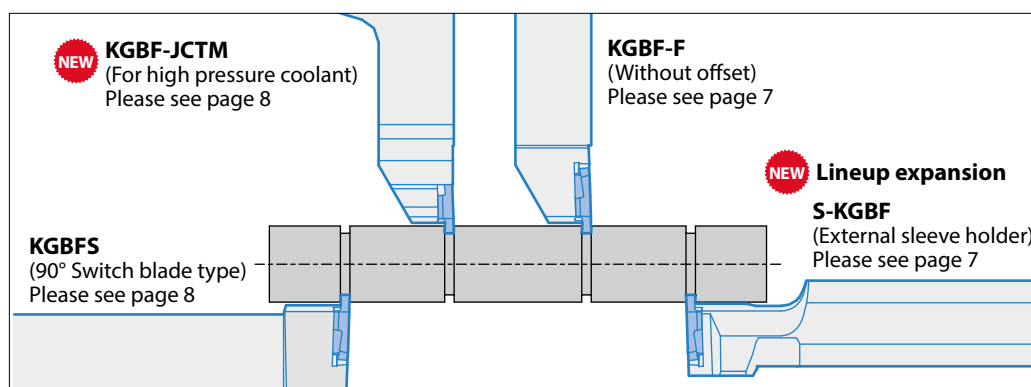


2 Stable chip control with GL chipbreaker



GL chipbreaker control chips stable at both grooving and traversing
(Traversing is not recommended for GBF32R075-005GL)

Twin dots Stable chip control

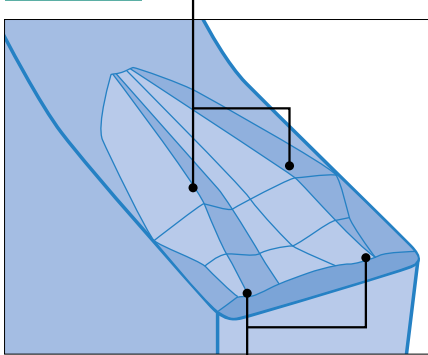

Front edge dots Chips are curled and break in short at low feed machining
Prevents chip clogging

Comparison of chip control (Internal evaluation)


	GL chipbreaker	Competitor A
Grooving $d = 1.5 \text{ mm}$ $f = 0.05 \text{ mm/rev}$		
Traversing $a_p = 0.2 \text{ mm}$ $f = 0.04 \text{ mm/rev}$		

Cutting conditions: $V_c = 80 \text{ m/min}$, edge width 1 mm
Workpiece: SUS304

Case studies

Nozzle parts stainless steel

$V_c = 45 \text{ m/min}$
 $f = 0.05 \text{ mm/rev}$
Groove depth 0.6 mm, wet
KGBFR1212JX-16F
GBF32R100-005GL PR1535



GL chipbreaker



Competitor A




Competitor A entangled chips with workpiece due to unstable chip control.
GL chipbreaker controlled chips stable without chips entangled.

(User evaluation)

3 Good surface finish

GL chipbreaker control chips stable at high feed machining,
good surface finish of side wall

Surface roughness comparison (Internal evaluation)

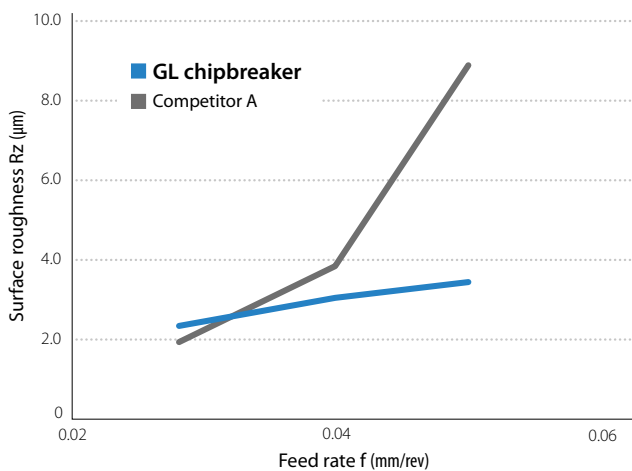

Comparison of chip control (Internal evaluation)


Feed rate f (mm/rev)	0.03	0.04	0.05
GL chipbreaker			
Competitor A (Molded chipbreaker)			

Cutting conditions: $V_c = 80 \text{ m/min}$, $d = 1.5 \text{ mm}$, $f = 0.03\text{--}0.05 \text{ mm/rev}$, edge width 1 mm
Workpiece: SCM415

4 JCTM series direct coolant holder for small parts machining added to lineup

Applicable to different supply styles
Supports internal coolant with/without piping system

Internal coolant delivers improved chip control and longer tool life while grooving


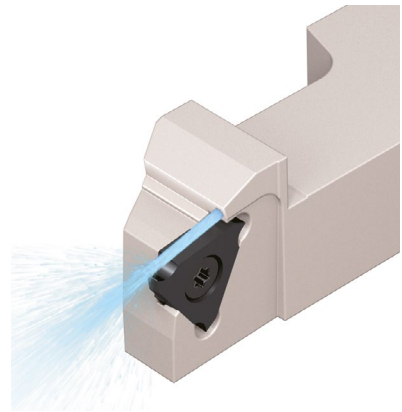


Internal coolant without piping *When the tool turret supports direct coolant

Coolant is supplied directly from tool turret into the holder. No need for piping just by installing tools

Applicable to wide range of machines **The tool turret is optional. Please contact our company sales representative for details.**

CITIZEN MACHINERY CO., LTD. (L20, D25, M32)
 STAR MICRONICS CO., LTD. (SB-R series, SR series, SV series)
 TSUGAMI CORPORATION (S205/206-II □ 16 type, S205A/206A-II □ 16 type)
 Compatible with various machine including the above. Toolholders can be customized as well. (Random order)
 Based on Kyocera survey in January 2021

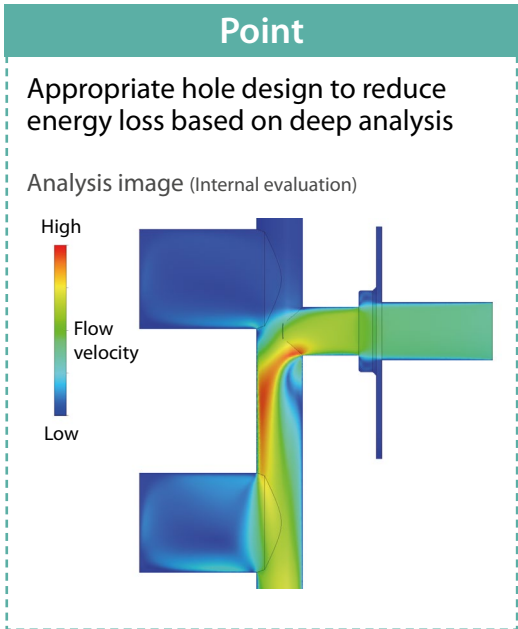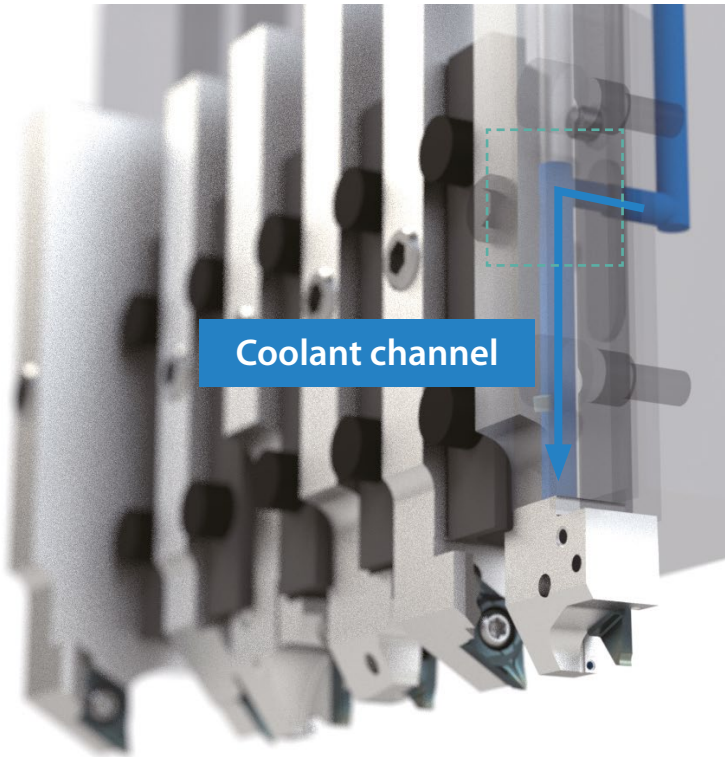


Internal coolant with piping

*Piping parts: See pages 9 and 10

Compatible with internal coolant on any machine with standard piping parts

Commercial piping parts are available when using at normal pressure

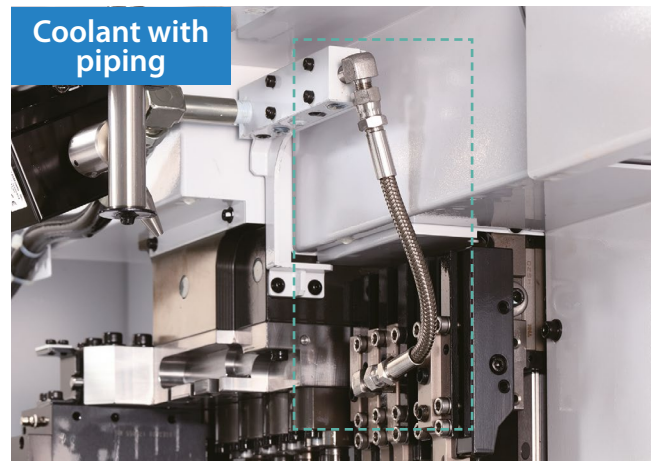

External grooving KGBF-JCTM



- Provides coolant toward the rake surface of insert
- Specification

Edge width: 0.25 -3 mm




Ground chipbreaker/Molded GL chipbreaker

Maximum groove depth: 3 mm

Coolant discharging comparison (Internal evaluation)

Small chips and better cooling of the insert leads to longer tool life


- Cutting edge
- Coolant hole

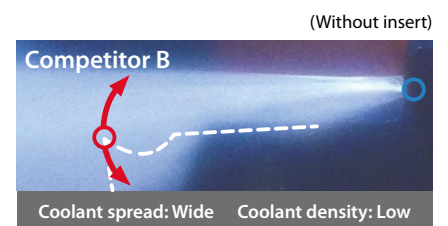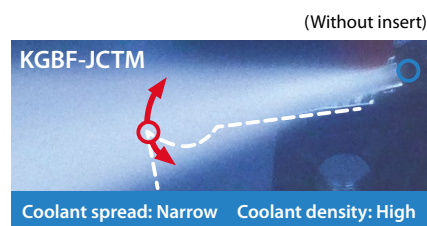

Applicable insert

(mm)

Description	IC	S	D1	Dimensions (mm)			MEGACOAT	MEGACOAT NANO	Carbide
Shape	Description	CW	CDX	RE	PR1215	PR1535	GW15		
GBF32 [®] / _L	025-000F	0.25	0.6	0.00	●	●	●	●	
	025-005			0.05	●	●	●	●	
	030-000F	0.30	0.8	0.00	●	●	●	●	
	030-005			0.05	●	●	●	●	
	033-000F ^{*1}	0.33	0.8	0.00	●	●	●	●	
	033-005 ^{*1}			0.05	●	●	●	●	
	043-000F ^{*2}	0.43	1.0	0.00	●	●	●	●	
	043-005 ^{*2}			0.05	●	●	●	●	
	050-000F	0.50	1.2	0.00	●	●	●	●	
	050-005			0.05	●	●	●	●	
	053-000F ^{*3}	0.53	1.2	0.00	●	●	●	●	
	053-005 ^{*3}			0.05	●	●	●	●	
	065-000F	0.65	1.2	0.00	●	●	●	●	
	065-005			0.05	●	●	●	●	
	075-000F	0.75	2.0	0.00	●	●	●	●	
	075-005			0.05	●	●	●	●	
NEW	075-010			0.10	●	●	●	●	
	080-000F	0.80	2.0	0.00	●	●	●	●	
	080-005			0.05	●	●	●	●	
NEW	080-010			0.10	●	●	●	●	
	095-000F	0.95	2.0	0.00	●	●	●	●	
	095-005			0.05	●	●	●	●	
NEW	095-010			0.10	●	●	●	●	
	100-000F	1.00	2.0	0.00	●	●	●	●	
	100-005			0.05	●	●	●	●	
NEW	100-010			0.10	●	●	●	●	
	110-000F	1.10	2.0	0.00	●	●	●	●	
	110-005			0.05	●	●	●	●	
NEW	110-010			0.10	●	●	●	●	
	120-000F	1.20	2.0	0.00	●	●	●	●	
	120-005			0.05	●	●	●	●	
NEW	120-010			0.10	●	●	●	●	
	125-000F	1.25	2.0	0.00	●	●	●	●	
	125-005			0.05	●	●	●	●	
	125-010			0.10	●	●	●	●	
	130-000F	1.30	2.0	0.00	●	●	●	●	
	130-005			0.05	●	●	●	●	
	130-010			0.10	●	●	●	●	
	140-000F	1.40	2.7	0.00	●	●	●	●	
	140-005			0.05	●	●	●	●	
	140-010			0.10	●	●	●	●	
	145-000F	1.45	2.7	0.00	●	●	●	●	
	145-005			0.05	●	●	●	●	
	145-010			0.10	●	●	●	●	
	150-000F	1.50	2.7	0.00	●	●	●	●	
	150-005			0.05	●	●	●	●	
	150-010			0.10	●	●	●	●	
	165-000F	1.65	2.7	0.00	●	●	●	●	
	165-005			0.05	●	●	●	●	
	165-010			0.10	●	●	●	●	
	170-000F	1.70	3.0	0.00	●	●	●	●	
	170-005			0.05	●	●	●	●	
	170-010			0.10	●	●	●	●	
	175-000F	1.75	3.0	0.00	●	●	●	●	
	175-005			0.05	●	●	●	●	
	175-010			0.10	●	●	●	●	
	200-000F	2.00	3.0	0.00	●	●	●	●	
	200-005			0.05	●	●	●	●	
	200-010			0.10	●	●	●	●	
	225-005	2.25	3.0	0.05	●	●	●	●	
	225-010			0.10	●	●	●	●	
	250-005	2.50	3.0	0.05	●	●	●	●	
	250-010			0.10	●	●	●	●	
	300-005	3.00	3.0	0.05	●	●	●	●	
	300-010			0.10	●	●	●	●	



Please check cautions on page 6 for the maximum machining diameter.

*1...Edge width tolerance of GBF32 [®]/_L 033-000F/005: 0.33 ^{+0.015}/_{-0.025}

*2...Edge width tolerance of GBF32 [®]/_L 043-000F/005: 0.43 ^{+0.015}/_{-0.025}

*3...Edge width tolerance of GBF32 [®]/_L 053-000F/005: 0.53 ^{+0.015}/_{-0.025}

● : Available

GBF-GL

Applicable insert

Description		IC	S	(mm)					
GBF32		9.525	3.18	D1					
Shape	Description	Dimensions (mm)			MEGACOAT	MEGACOAT NANO			
		CW	CDX	RE	PR1215	PR1535			
	GBF32R 075-005GL	0.75	2.0	0.05	R	R			
	095-005GL	0.95	2.0	0.05	R	R			
	100-005GL	1.00	2.0	0.05	R	R			
	150-010GL	1.50	2.7	0.10	R	R			
	200-010GL	2.00	3.0	0.10	R	R			
	300-010GL	3.00	3.0	0.10	R	R			

Please check precautions below for the maximum machining diameter.

R: R-hand only

When using a KGBF/KGBFS holder to machining non-ferrous metals, etc.

GBA

Applicable insert

Description		IC	S	(mm)				PCD			
GBA32		9.525	3.18	D1				KPD001		KPD010	
Shape	Description	Dimensions (mm)			PCD						
		CW	CDX	RE	KPD001		KPD010				
	GBA32R 125-010	1.25	2.0	0.1	NEW ●		●				
	150-010	1.50			●		●				
	NEW 200-010	2.00	2.5		●						

CDX shows available grooving depth.

● : Available

When using a KGBF/KGBFS holder for non-ferrous metal machining, use a GBA PCD tool.
*See above for details of description. Also, please refer to the precautions below when using.

Precautions


GBF and GBA compatibility

- GBF will fit KGBA/KGBAS holders.
Caution: The maximum groove depth for KGBA/KGBAS holders is 2.5 mm.
- GBA inserts will also fit KGBF/KGBFS holders.
Caution: The rake angle after installation in the toolholder is 11°.


KGBF/KGBFS holder with GBF insert maximum machining diameter

3 mm groove depth is available on workpiece diameters up to $\phi 51$ mm.
2.7 mm groove depth is available on workpiece diameters up to $\phi 100$ mm,
2.5 mm groove depth is available on workpiece diameters up to $\phi 200$ mm.
The workpiece interferes with the holder at maximum cutting diameter or larger.

Grooving depth: 3 mm

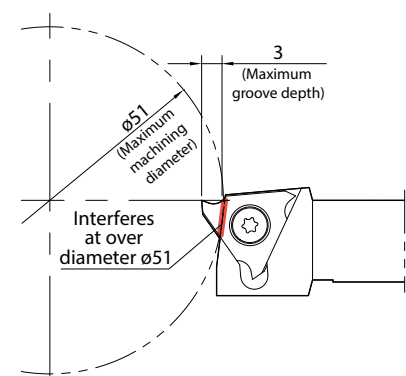

KGBF-F (Without offset)

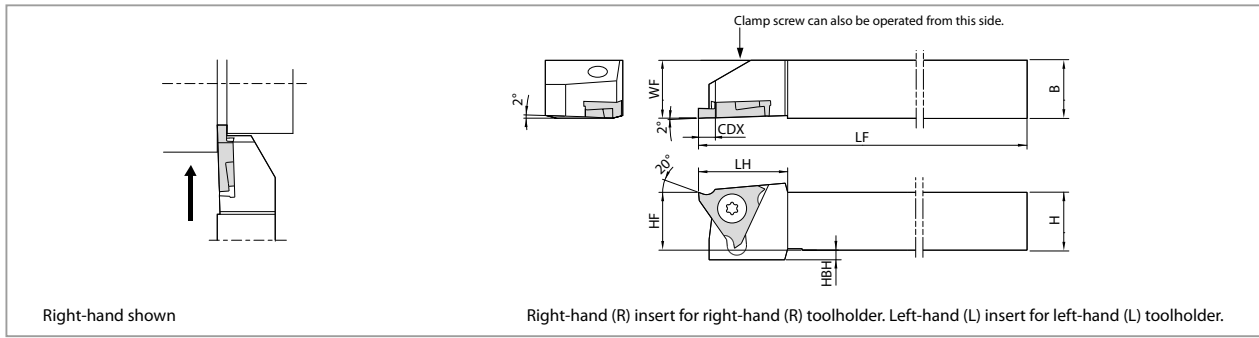


Toolholder dimensions

Description	Availability		Dimensions (mm)						Spare parts		
	R	L	H = HF	HBH	B = WF	LF	LH	CDX *1	Clamp screw	Wrench	
KGBF ^{R/L}	1010JX-16F	●	●	10	4	10	120	18.5	3	SB-4070TRW	FT-8
	1212JX-16F	●	●	12	2	12					
	1616JX-16F	●	●	16	-	16					
	2020JX-16F	●	●	20	-	20					

*1. CDX shows the distance from the toolholder to the cutting edge. Available groove depth: "CDX" of insert. ● : Available
Please check cautions on page 6 for the maximum machining diameter.

S-KGBF (Sleeve holder)

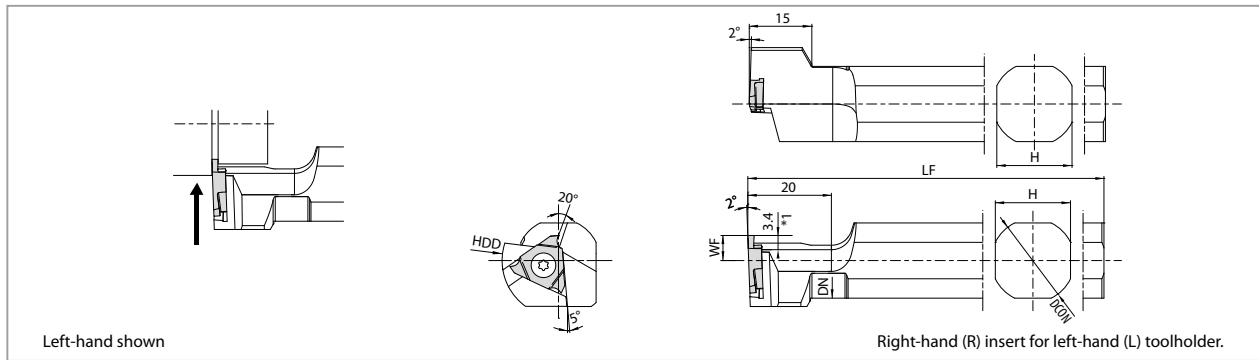


*1. CDX shows available grooving depth.

Toolholder dimensions



Description	Availability	Dimensions (mm)						Spare parts	
	L	DCON	LF	WF	DN	HDD	H	Clamp screw	Wrench
S12F -KGBFL16	●	12	80	6	11	27	11	SB-4070TRW	FT-8
S14H -KGBFL16	●	14	100		13		13		
S15F -KGBFL16	●	15.875	85		15		15		
S16F -KGBFL16	●	16			18		17		
S19G -KGBFL16	●	19.05	90		19		18		
S19K -KGBFL16	●		120		21		20		
S20G -KGBFL16	●	20	120		19		18		
S20K -KGBFL16	●	22			21		20		
S22K -KGBFL16	●	25	100	10	24	32	23	SB-4070TRW	FT-8
S25.0H -KGBFL16	●	25.4	120		24		23		

● : Available

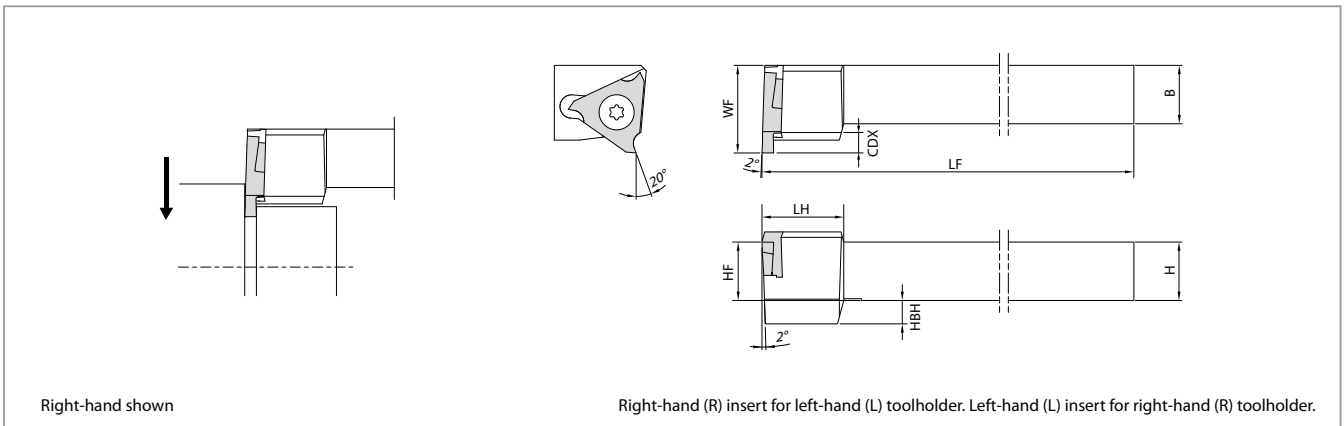KGBFS




Toolholder dimensions

Description	Availability		Dimensions (mm)							Spare parts		
	R	L	H = HF	HBH	B	LF	LH	WF	CDX *1	Clamp Screw	Wrench	
												
KGBFS ^{R/L}	1010JX-16	●	●	10	4	10	120	14	15	3	SB-4070TRW	FT-8
	1212JX-16	●	●	12	2	12			16			
	1616JX-16	●	●	16	—	16			20			





*1. CDX shows the distance from the toolholder to the cutting edge. Available groove depth: "CDX" of insert. Please check cautions on page 6 for the maximum machining diameter.

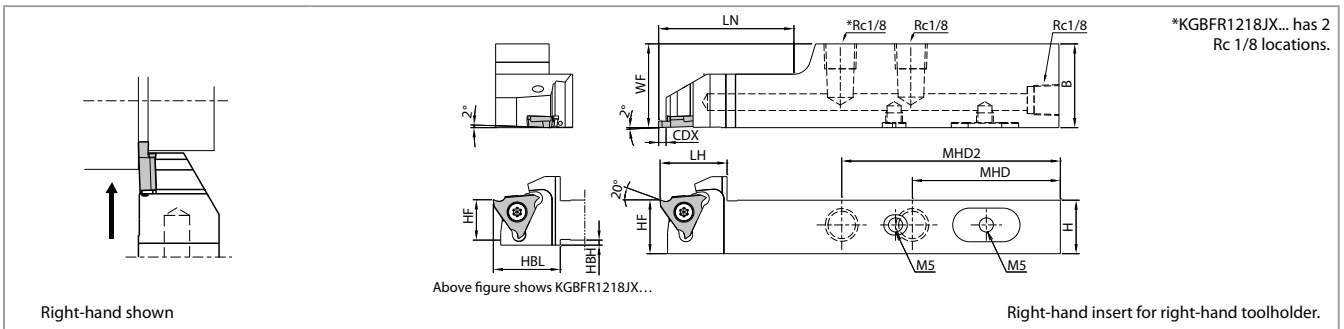● : Available

KGBF-JCTM



Toolholder dimensions

Description	Availability		Dimensions (mm)											Spare parts			
	R	L	H=HF	HBH	B	LF	HBL	LH	LN	WF	CDX *1	MHD	MHD2	Clamp screw	Wrench	Plug 1	Plug 2
																	
KGBFR	1218JX-16FJCTM	●		12	1.5	18	20	20	28	12	3	54	—	SB-4070TRW	FT-8	GP-1	HSSX4LP
	1625JX-16FJCTM	●		16	—	25			40	16		44	65				—
	2025JX-16FJCTM	●		20	—	—			—	—		—	—				—

*1. CDX shows the distance from the toolholder to the cutting edge. Available groove depth: "CDX" of insert. Please check cautions on page 6 for the maximum machining diameter.



● : Available

*2. For coolant holder piping parts, see pages 9 and 10.

Coolant pipe parts

Pipe parts will be required separately if internal coolant is used.

Pump pressure: Up to 20 MPa. Pump pressure: Up to 7.5 MPa if coupling are used.

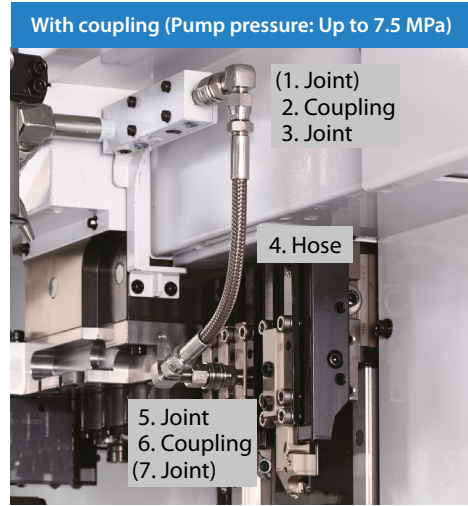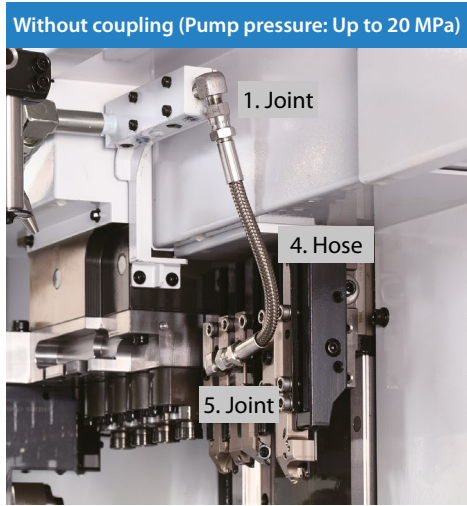

Combination part description (Example)

Part	Description
1. Joint	J-AN-R1/8-G1/8
4. Hose	HS-G1/8-G1/8-200
5. Joint	J-AN-R1/8-G1/8

Convert the thread standards on the machine's side (Rc1/4, Rc1/8, NPT1/8, etc.) to the thread standard on the hose side (G1/8) for use.
Use sealing agents such as seal tapes when installing piping parts.

Combination part description (Example)


Part	Description
(1. Joint)	-
2. Coupling	CP-ST-R1/8, P-ST-RC1/8
3. Joint	J-AN-R1/8-G1/8
4. Hose	HS-G1/8-G1/8-200
5. Joint	J-AN-R1/8-G1/8
6. Coupling	P-ST-RC1/8, CP-ST-R1/8
(7. Joint)	-

Convert the thread standards on the machine's side (Rc1/4, Rc1/8, NPT1/8, etc.) to thread standards of the coupling (Rc1/8, etc.) or hose (G1/8) for use.
Use sealing agents such as seal tapes when installing piping parts.

Without coupling (Pump pressure: Up to 20 MPa)



With coupling (Pump pressure: Up to 7.5 MPa)

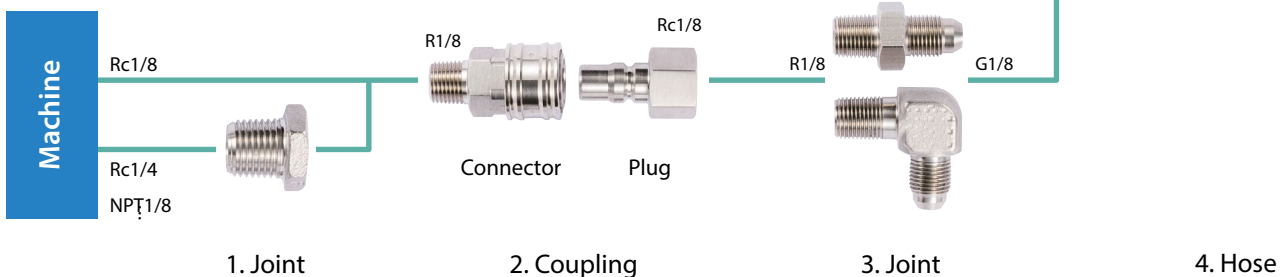

Piping part dimensions

Joint (1, 3, 5, 7) Pressure resistance: Up to 20.0 MPa

(Unit: mm)

Shape	Description	Availability	ød1	ød2	L	L1	L2	T1	T2
	J-ST-R1/4-G1/8	●	5.5	4.0	34	13	13	R1/4	G1/8
	J-ST-NPT1/8-G1/8	●	3.5	3.5	29	10	13	NPT1/8	G1/8
	J-ST-R1/8-G1/8	●	4.0	4.0	29	10	13	R1/8	G1/8
	J-AN-R1/8-G1/8	●	4.0	4.0	27	14	13	R1/8	G1/8
	J-ST-R1/4-RC1/8	●	-	-	17	12	-	R1/4	Rc1/8
	J-ST-NPT1/8-RC1/8	●	3.5	-	30	10	-	NPT1/8	Rc1/8
	J-ST-R1/8-RC1/8	●	3.5	-	33	13	-	R1/8	Rc1/8

● : Available

Coupling (2, 6) Pressure resistance: Up to 7.5 MPa

(Unit: mm)

Shape	Description	Availability
	CP-ST-R1/8	●
	P-ST-RC1/8	●


● : Available

Hose (4) Pressure resistance: Up to 20.0 MPa

(Unit: mm)

Shape	Description	Availability	L
	HS-G1/8-G1/8-200	●	200
	HS-G1/8-G1/8-300	●	300
	HS-G1/8-G1/8-400	●	400
	HS-G1/8-G1/8-500	●	500
	HS-G1/8-G1/8-600	●	600
	HS-G1/8-G1/8-800	●	800

● : Available

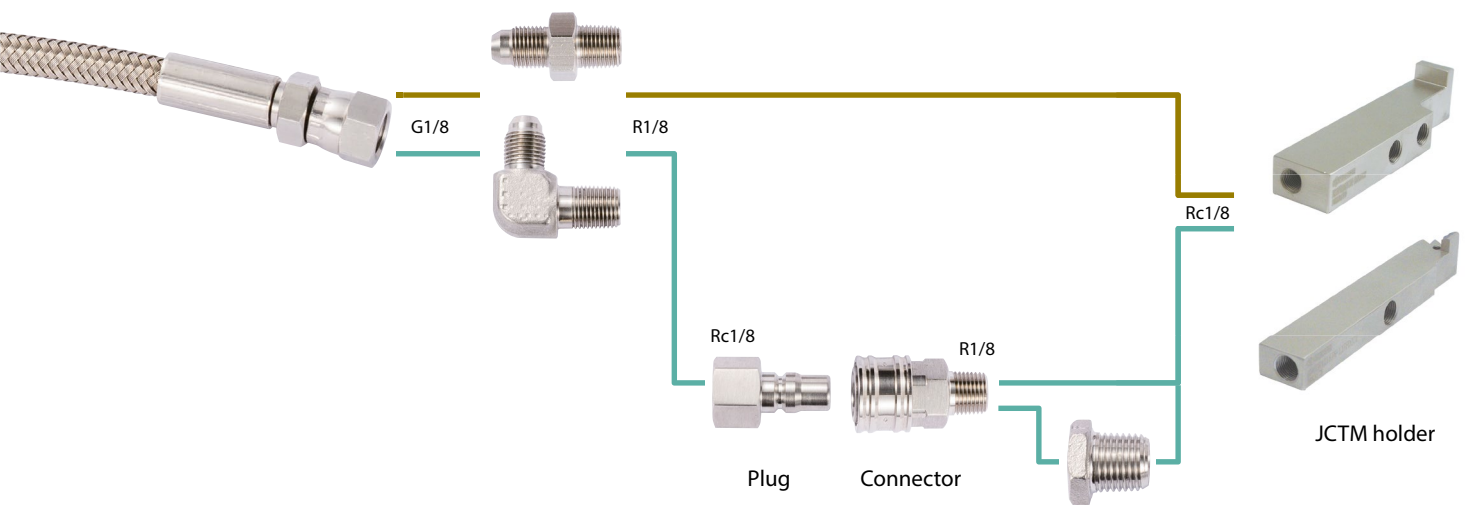

4. Hose

5. Joint

6. Coupling

7. Joint (Extension joint)

Recommended cutting conditions ★ 1st Recommendation ☆ 2nd Recommendation

GBF

Workpiece	Recommended insert grade (Vc : m/min)			[1] Grooving feed rate (mm/rev) [2] Traversing feed rate (mm/rev) [3] Max D.O.C. for traversing (mm)			
	MEGACOAT	MEGACOAT NANO	Carbide				
	PR1215	PR1535	GW15	GBF32 [°] / _L 025 ~ 053	GBF32 [°] / _L 065 ~ 095	GBF32 [°] / _L 100 ~ 145	GBF32 [°] / _L 150 ~ 300
Carbon steel	★ 80 ~ 180	☆ 70 ~ 160	—	[1] 0.01~0.05 [2] Not recommended [3] Not recommended	[1] 0.02~0.07 [2] Not recommended [3] Not recommended	[1] 0.03~0.08 [2] 0.03~0.06 [3] MAX. 0.2	[1] 0.03~0.08 [2] 0.03~0.06 [3] MAX. 0.2
Alloy steel	★ 80 ~ 180	☆ 70 ~ 160	—	[1] 0.01~0.04 [2] Not recommended [3] Not recommended	[1] 0.02~0.06 [2] Not recommended [3] Not recommended	[1] 0.03~0.07 [2] 0.02~0.05 [3] MAX. 0.2	[1] 0.03~0.07 [2] 0.02~0.05 [3] MAX. 0.2
Stainless steel	☆ 60 ~ 130	★ 50 ~ 120	—	[1] 0.01~0.04 [2] Not recommended [3] Not recommended	[1] 0.02~0.06 [2] Not recommended [3] Not recommended	[1] 0.03~0.07 [2] 0.02~0.05 [3] MAX. 0.2	[1] 0.03~0.07 [2] 0.02~0.05 [3] MAX. 0.2
Cast iron	—	—	★ 60 ~ 100	[1] 0.01~0.05 [2] Not recommended [3] Not recommended	[1] 0.02~0.07 [2] Not recommended [3] Not recommended	[1] 0.03~0.08 [2] 0.03~0.06 [3] MAX. 0.2	[1] 0.03~0.08 [2] 0.03~0.06 [3] MAX. 0.2
Aluminum alloy	—	—	★ 150 ~ 400	[1] 0.01~0.05 [2] Not recommended [3] Not recommended	[1] 0.02~0.07 [2] Not recommended [3] Not recommended	[1] 0.03~0.08 [2] 0.03~0.06 [3] MAX. 0.2	[1] 0.03~0.08 [2] 0.03~0.06 [3] MAX. 0.2
Brass	—	—	★ 150 ~ 300	[1] 0.01~0.04 [2] Not recommended [3] Not recommended	[1] 0.02~0.06 [2] Not recommended [3] Not recommended	[1] 0.03~0.07 [2] 0.02~0.05 [3] MAX. 0.2	[1] 0.03~0.07 [2] 0.02~0.05 [3] MAX. 0.2

GBF-00F (rε=0.00)

Workpiece	Recommended insert grade (Vc : m/min)			[1] Grooving feed rate (mm/rev) [2] Traversing feed rate (mm/rev) [3] Max D.O.C. for traversing (mm)			
	MEGACOAT	MEGACOAT NANO	Carbide				
	PR1215	PR1535	GW15	GBF32 [°] / _L 025 ~ 053 - 000F	GBF32 [°] / _L 065 ~ 095 - 000F	GBF32 [°] / _L 100 ~ 145 - 000F	GBF32 [°] / _L 150 ~ 200 - 000F
Carbon steel	★ 80 ~ 180	☆ 70 ~ 160	—	[1] 0.005~0.03 [2] Not recommended [3] Not recommended	[1] 0.01~0.04 [2] Not recommended [3] Not recommended	[1] 0.01~0.05 [2] 0.01~0.04 [3] MAX. 0.2	[1] 0.01~0.05 [2] 0.01~0.04 [3] MAX. 0.2
Alloy steel	★ 80 ~ 180	☆ 70 ~ 160	—	[1] 0.005~0.025 [2] Not recommended [3] Not recommended	[1] 0.01~0.03 [2] Not recommended [3] Not recommended	[1] 0.01~0.04 [2] 0.01~0.03 [3] MAX. 0.2	[1] 0.01~0.04 [2] 0.01~0.03 [3] MAX. 0.2
Stainless steel	☆ 60 ~ 130	★ 50 ~ 120	—	[1] 0.005~0.02 [2] Not recommended [3] Not recommended	[1] 0.01~0.025 [2] Not recommended [3] Not recommended	[1] 0.01~0.03 [2] 0.01~0.025 [3] MAX. 0.2	[1] 0.01~0.03 [2] 0.01~0.025 [3] MAX. 0.2
Cast iron	—	—	★ 60 ~ 100	[1] 0.005~0.03 [2] Not recommended [3] Not recommended	[1] 0.01~0.04 [2] Not recommended [3] Not recommended	[1] 0.01~0.05 [2] 0.01~0.04 [3] MAX. 0.2	[1] 0.01~0.05 [2] 0.01~0.04 [3] MAX. 0.2
Aluminum alloy	—	—	★ 150 ~ 400	[1] 0.005~0.03 [2] Not recommended [3] Not recommended	[1] 0.01~0.04 [2] Not recommended [3] Not recommended	[1] 0.01~0.05 [2] 0.01~0.04 [3] MAX. 0.2	[1] 0.01~0.05 [2] 0.01~0.04 [3] MAX. 0.2
Brass	—	—	★ 150 ~ 300	[1] 0.01~0.03 [2] Not recommended [3] Not recommended	[1] 0.01~0.04 [2] Not recommended [3] Not recommended	[1] 0.01~0.05 [2] 0.01~0.04 [3] MAX. 0.2	[1] 0.01~0.05 [2] 0.01~0.04 [3] MAX. 0.2

GBF-GL

Workpiece	Recommended insert grade (Vc : m/min)		[1] Grooving feed rate (mm/rev) [2] Traversing feed rate (mm/rev) [3] Max D.O.C. for traversing (mm)			
	MEGACOAT	MEGACOAT NANO				
	PR1215	PR1535	GBF32R 075 - 005GL	GBF32R 095 ~ 100 - 005GL	GBF32R 150 ~ 200 - 010GL	GBF32R 300 - 010GL
Carbon steel	★ 80 ~ 180	☆ 70 ~ 160	[1] 0.02~0.07 [2] Not recommended [3] Not recommended	[1] 0.03~0.08 [2] 0.03~0.06 [3] MAX. 0.2	[1] 0.03~0.08 [2] 0.03~0.06 [3] MAX. 0.5	[1] 0.04~0.1 [2] 0.04~0.08 [3] MAX. 0.5
Alloy steel	★ 80 ~ 180	☆ 70 ~ 160	[1] 0.02~0.06 [2] Not recommended [3] Not recommended	[1] 0.03~0.07 [2] 0.03~0.06 [3] MAX. 0.2	[1] 0.03~0.07 [2] 0.03~0.06 [3] MAX. 0.3	[1] 0.04~0.09 [2] 0.04~0.08 [3] MAX. 0.5
Stainless steel	☆ 60 ~ 130	★ 50 ~ 120	[1] 0.02~0.06 [2] Not recommended [3] Not recommended	[1] 0.03~0.07 [2] 0.03~0.06 [3] MAX. 0.2	[1] 0.03~0.07 [2] 0.03~0.06 [3] MAX. 0.3	[1] 0.04~0.09 [2] 0.04~0.08 [3] MAX. 0.5

GBA32 (PCD)

Workpiece	Recommended insert grade (Vc : m/min)	[1] Grooving feed rate (mm/rev) [2] Traversing feed rate (mm/rev) [3] Max D.O.C. for traversing (mm)
	PCD	
	KPD001 (KPD010)	GBA32R 125 ~ 200 - 010
Aluminum alloy	★ 150 ~ 2,000	[1] 0.05~0.15 [2] 0.05~0.15 [3] Max. 0.5
Brass	★ 200 ~ 800	[1] 0.05~0.15 [2] 0.05~0.15 [3] Max. 0.5